

952.827

## TALK THROUGH GLASS INTERCOM




Designed to allow conversation through a glass partition. Typical applications are Ticket Booth, Bank Counter, Petrol Station and Reception.

- Desk mount Base Station with condenser gooseneck microphone.
- Glass mount remote station.
- Red LED power on indication.
- Call tone to alert base station.
- Rotary switched volume control.
- Supplied with interconnection cable and AC/DC adaptor.

# Operation Manual

HCGM20P0AD

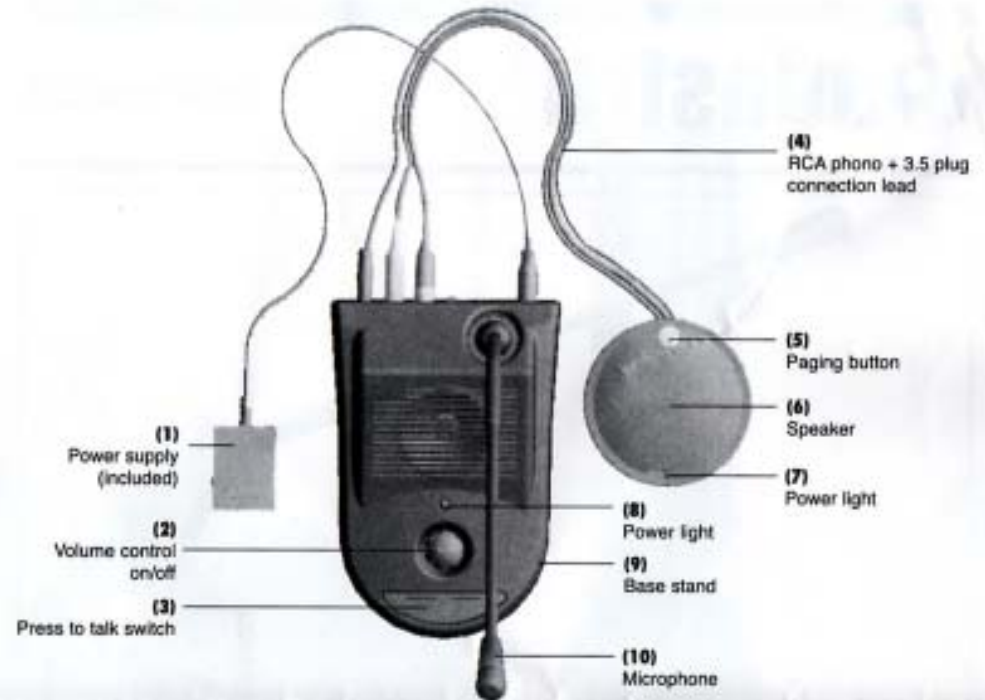

## INSTALLATION

### Glass Microphone/Speaker Unit

This unit can be mounted either with the adhesive Velcro pads or can be screwed in place using the rear cover as follows:

1. Cut a 50mm diameter hole in the glass.
2. Unscrew the rear cover.
3. Put the cable through the glass and rear cover.
4. Re-attach the cover to the microphone and route the cable to the base station.

### Base Station

1. Connect the cable to the appropriate sockets at the rear of the unit.
2. Plug in the gooseneck microphone. (NOTE: Set slide switch on rear panel to "EM" position).
3. Connect the power supply unit.

## OPERATION

1. Turn on the volume control and the red LED will illuminate on both units.
2. Pressing the PAGING button on the glass microphone alerts the base station.
3. Press the TALK button to converse with the client.
4. Adjust volume control to desired level.

## SPECIFICATION

Power .....	DC 9v 300mA
Power consumption .....	150mA
Speaker output .....	.400mW max.
Cable length .....	.3m
Dims: Base Station .....	.15 x .62 x .173 mm (WxHxD)
Glass Mic. ....	.85mm dia x 35mm